

# GAOLIN ELECTRONICS

## CPCI+ POWER SOCKET 6U8SLOTS BACKPLANE

### Technology Specification

CB6108110-300

Issue Date: 2013-05-18

# CPCI+POWER SOCKET 6U8SLOTS BACKPLANE

## Technology Specification

### DESIGN ACCORDING TO:

- CPCI Specification PICMG 2.0 R3.0 (October 1, 1999)
- CPCI Hot Swap Specification PICMG 2.1 R1.0 (August 3, 1998)
- CPCI System Management Specification PICMG 2.9 R1.0 (February 2, 2000)
- Keying of CPCI Boards and Backplanes PICMG 2.10 R1.0 (October 1, 1999)
- CPCI Power Interface Specification PICMG 2.11 R1.0 (October 1, 1999)

### BUS STRUCTURES:

Three PCIH47 PSU Receptacle								
P5	I/O							
P4	I/O							
P3	I/O							
P2	64bit/33MHz CPCI							
P1								
Slot	1	2	3	4	5	6	7	8
SPEC	System	Peripheral						

### TECHNICAL DATA:

- 8 Slot: 1 System Slot +7 Peripheral slots
- All Peripheral slots support 64bit/33Mhz CPCI bus;
- Mechanical dimension: 395.40×171.72 ×4.0mm (width×height×thickness), support 6U card.
- PCB Type: 10 layers
- Power connector: Three CPCI Power Receptacle for Redundant PSU
- Maximum voltage drop on backplane power: <20mV
- V(I/O): +3.3V / +5V selectable
- Impedance: 65ohm ±10% for trace
- Operating temperature: -40°C ~ +85°C
- Storage temperature: -55°C ~ +85°C
- MTBF: 700,000h

**PIN ASSIGNMENT:**

See following tables.

**P1 of Slot1**

25	GND	5V	REQ64#	ENUM#	3.3V	5V	GND
24	GND	AD1	5V	V(I/O)	AD0	ACK64#	GND
23	GND	3.3V	AD4	AD3	5V	AD2	GND
22	GND	AD7	GND	3.3V	AD6	AD5	GND
21	GND	3.3V	AD9	AD8	M66EN	C/BE0#	GND
20	GND	AD12	GND	V(I/O)	AD11	AD10	GND
19	GND	3.3V	AD15	AD14	GND	AD13	GND
18	GND	SERR#	GND	3.3V	PAR	C/BE1#	GND
17	GND	3.3V	IPMB_SCL	IPMB_SDA	GND	PERR#	GND
16	GND	DEVSEL#	GND	V(I/O)	STOP#	LOCK#	GND
15	GND	3.3V	FRAME#	IRDY#	GND	TRDY#	GND
14	<b>KEY AREA</b>						
13							
12							
11	GND	AD18	AD17	AD16	GND	C/BE2#	GND
10	GND	AD21	GND	3.3V	AD20	AD19	GND
9	GND	C/BE3#	GND	AD23	GND	AD22	GND
8	GND	AD26	GND	V(I/O)	AD25	AD24	GND
7	GND	AD30	AD29	AD28	GND	AD27	GND
6	GND	REQ#	GND	3.3V	CLK	AD31	GND
5	GND	BRSVP1A5	BRSVP1B5	PCI_RST#	GND	GNT#	GND
4	GND	IPMB_PWR	HEALTHY1#	V(I/O)	INTP	INTS	GND
3	GND	INTA#	INTB#	INTC#	5V	INTD#	GND
2	GND	TCK	5V	TMS	TDO	TDI	GND
1	GND	5V	-12V	TRST#	+12V	5V	GND
<b>Pin</b>	<b>Z</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>

**P1 of Slot 2~8**

25	GND	5V	REQ64#	ENUM#	3.3V	5V	GND
24	GND	AD1	5V	V(I/O)	AD0	ACK64#	GND
23	GND	3.3V	AD4	AD3	5V	AD2	GND
22	GND	AD7	GND	3.3V	AD6	AD5	GND
21	GND	3.3V	AD9	AD8	M66EN	C/BE0#	GND
20	GND	AD12	GND	V(I/O)	AD11	AD10	GND
19	GND	3.3V	AD15	AD14	GND	AD13	GND
18	GND	SERR#	GND	3.3V	PAR	C/BE1#	GND
17	GND	3.3V	IPMB_SCL	IPMB_SDA	GND	PERR#	GND
16	GND	DEVSEL#	GND	V(I/O)	STOP#	LOCK#	GND
15	GND	3.3V	FRAME#	IRDY#	BD_SEL#	TRDY#	GND
14	<b>KEY AREA</b>						
13							
12							
11	GND	AD18	AD17	AD16	GND	C/BE2#	GND
10	GND	AD21	GND	3.3V	AD20	AD19	GND
9	GND	C/BE3#	IDSEL	AD23	GND	AD22	GND
8	GND	AD26	GND	V(I/O)	AD25	AD24	GND
7	GND	AD30	AD29	AD28	GND	AD27	GND
6	GND	REQ0#	GND	3.3V	CLK0	AD31	GND
5	GND	BRSVP1A5	BRSVP1B5	PCI_RST#	GND	GNT0#	GND
4	GND	IPMB_PWR	HEALTHY1#	V(I/O)	INTP	INTS	GND
3	GND	INTA#	INTB#	INTC#	5V	INTD#	GND
2	GND	TCK	5V	TMS	TDO	TDI	GND
1	GND	5V	-12V	TRST#	+12V	5V	GND
<b>Pin</b>	<b>Z</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>

**P2 of Slot 1**

<b>22</b>	GND	GA4	GA3	GA2	GA1	GA0	GND
<b>21</b>	GND	CLK6	GND	RSV	RSV	RSV	GND
<b>20</b>	GND	CLK5	GND	RSV	GND	RSV	GND
<b>19</b>	GND	GND	GND	SMB_SDA	SMB_SCL	SMB_ALERT	GND
<b>18</b>	GND	BRSVP2A18	BRSVP2B18	BRSVP2C18	GND	BRSVP2E18	GND
<b>17</b>	GND	BRSVP2A17	GND	PRST#	REQ6#	GNT6#	GND
<b>16</b>	GND	BRSVP2A16	BRSVP2B16	DEG#	GND	BRSVP2E16	GND
<b>15</b>	GND	BRSVP2A15	GND	FAL#	REQ5#	GNT5#	GND
<b>14</b>	GND	AD35	AD34	AD33	GND	AD32	GND
<b>13</b>	GND	AD38	GND	V(I/O)	AD37	AD36	GND
<b>12</b>	GND	AD42	AD41	AD40	GND	AD39	GND
<b>11</b>	GND	AD45	GND	V(I/O)	AD44	AD43	GND
<b>10</b>	GND	AD49	AD48	AD47	GND	AD46	GND
<b>9</b>	GND	AD52	GND	V(I/O)	AD51	AD50	GND
<b>8</b>	GND	AD56	AD55	AD54	GND	AD53	GND
<b>7</b>	GND	AD59	GND	V(I/O)	AD58	AD57	GND
<b>6</b>	GND	AD63	AD62	AD61	GND	AD60	GND
<b>5</b>	GND	C/BE5#	GND	V(I/O)	C/BE4#	PAR64	GND
<b>4</b>	GND	V(I/O)	BRSVP2B4	C/BE7#	GND	C/BE6#	GND
<b>3</b>	GND	CLK4	GND	GNT3#	REQ4#	GNT4#	GND
<b>2</b>	GND	CLK2	CLK3	GND	GNT2#	REQ3#	GND
<b>1</b>	GND	CLK1	GND	REQ1#	GNT1#	REQ2#	GND
<b>Pin</b>	<b>Z</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>

**P2 of Slot 2~8**

22	GND	GA4	GA3	GA2	GA1	GA0	GND
21	GND						GND
20	GND				GND		GND
19	GND						GND
18	GND	BRSVP2A18	BRSVP2B18	BRSVP2C18	GND	BRSVP2E18	GND
17	GND	BRSVP2A17	GND				GND
16	GND	BRSVP2A16	BRSVP2B16		GND	BRSVP2E16	GND
15	GND	BRSVP2A15	GND				GND
14	GND	AD35	AD34	AD33	GND	AD32	GND
13	GND	AD38	GND	V(I/O)	AD3	AD36	GND
12	GND	AD42	AD41	AD40	GND	AD39	GND
11	GND	AD45	GND	V(I/O)	AD4	AD43	GND
10	GND	AD49	AD48	AD47	GND	AD46	GND
9	GND	AD52	GND	V(I/O)	AD5	AD50	GND
8	GND	AD56	AD55	AD54	GND	AD53	GND
7	GND	AD59	GND	V(I/O)	AD5	AD57	GND
6	GND	AD63	AD62	AD61	GND	AD60	GND
5	GND	C/BE5#	GND	V(I/O)	C/BE	PAR64	GND
4	GND	V(I/O)	BRSVP2B4	C/BE7#	GND	C/BE6#	GND
3	GND		GND				GND
2	GND						GND
1	GND		GND				GND
<b>Pin</b>	<b>Z</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>

**P3 of Slot 1~8**

19	GND						GND
18	GND						GND
17	GND						GND
16	GND						GND
15	GND						GND
14	GND						GND
13	GND						GND
12	GND						GND
11	GND						GND
10	GND						GND
9	GND						GND
8	GND						GND
7	GND						GND
6	GND						GND
5	GND						GND
4	GND						GND
3	GND						GND
2	GND						GND
1	GND						GND
<b>Pin</b>	<b>Z</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>

**P4 of Slot1~8**

25	GND						GND
24	GND						GND
23	GND						GND
22	GND						GND
21	GND						GND
20	GND						GND
19	GND						GND
18	GND						GND
17	GND						GND
16	GND						GND
15	GND						GND
14	<b>KEY AREA</b>						
13							
12							
11	GND						GND
10	GND						GND
9	GND						GND
8	GND						GND
7	GND						GND
6	GND						GND
5	GND						GND
4	GND						GND
3	GND						GND
2	GND						GND
1	GND						GND
<b>Pin</b>	<b>Z</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>



**P5 of Slot 1~8**

22	GND						GND
21	GND						GND
20	GND						GND
19	GND						GND
18	GND						GND
17	GND						GND
16	GND						GND
15	GND						GND
14	GND						GND
13	GND						GND
12	GND						GND
11	GND						GND
10	GND						GND
9	GND						GND
8	GND						GND
7	GND						GND
6	GND						GND
5	GND						GND
4	GND						GND
3	GND						GND
2	GND						GND
1	GND						GND
<b>Pin</b>	<b>Z</b>	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>

## Backplane Connector Description

### VI/O Taps (JP1&JP2):

设置 CPCI 总线的 VI/O 电压: +3.3V / +5V 可选, 出厂默认+5V.

### PWR\_ON:

This connector is used for ATX power supply by shorting it with cap.

### RESET:

This connector can reset the system board by shorting the headers of it.

### IPMB:

System Management.

Pin	Signal	Pin	Signal
1	IPMB_PWR	2	SMB_ALERT
3	IPMB_SDA	4	SMB_SDA
5	IPMB_SCL	6	SMB_SCL
7	GND	8	GND
9	GND	10	GND

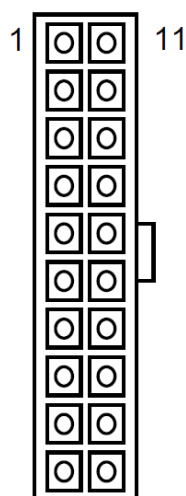
### Volt:

All the alarm signals and various power supply are connected to it. It is used to connect external monitor module.

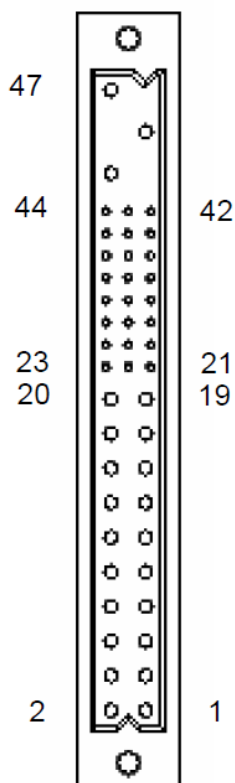
Pin	Signal	Pin	Signal
1	-12V	2	PRST#
3	+12V	4	DEG#
5	3.3V	6	FAL#
7	5V	8	GND
9	INH#	10	GND

### INPUT: 交流输入端

Pin	Signal	Pin	Signal	Pin	Signal
1	ACL/-DC	2	ACN/+DC	3	CGND

**XP1: ATX Power Connector**

Pin	Signal	Pin	Signal
1	+3.3V	11	+3.3V
2	+3.3V	12	-12V
3	GND	13	GND
4	+5V	14	PS_ON_L
5	GND	15	GND
6	+5V	16	GND
7	GND	17	GND
8	POWER GOOD	18	-5V
9	5V STB	19	+5V
10	+12V	20	+5V

**POWER\_1~3: Modular Power 47P Connector**

Pin	Signal	Pin	Signal
47	ACL/-DC IN	31	GA2
46	ACN/+DC IN	30	V1 SENSE
45	CGND	29	V1ADJ
44	V3 SHARE	28	GA1
43	IPMB_PWR	27	EN#
42	+FAL#	26	RESERVED
41	V2 SHARE	25	GA0
40	IPMB_SDA	24	RTN
39	INH#	23	RESERVED
38	DEG#	22	RTN
37	IPMB_SCL	21	V4
36	V3 SENSE	20	V3
35	V1 SHARE	19	RTN
34	S RTN	13-18	V2
33	V2 SENSE	5-12	RTN
32	V2ADJ	1-4	V1

# TOP VIEW

