

HiTRON

Universal AC input harmonic correction AC-DC hot-swappable CompactPCI quad output 300 Watts active current sharing switching power supplies HAC300U-490



Features

- 300W 3U x 8HP CPCI package
- Wide operating temperature/high efficiency
- No minimum load requirements
- N+1 redundancy and hot-swappable
- Fully compliant with PICMG
- I²c interface optional



Specification

Input

Input Voltage	90-264VAC
Input Frequency	47-63Hz
Input Current	3.1A at 115VAC, 1.6A at 230VAC
Inrush Current	9.37Arms at 230VAC
Power Factor	Typical 0.95-0.98
Input Connector	Positronic 47-pin PCIH47M400A1
Earth Leakage Current	Less than 0.73mA at 230VAC

Output

Output Connector	Positronic 47-pin PCIH47M400A1
Line Regulation	Typical 0.1%
Load Regulation	Typical ±1%
Total Regulation	V1-3 typical ±2%, V4 typical ±3%.
Noise & Ripple	1% pk to pk or 50mV, whichever is greater

Remote Sense Available at V1,V2,V3

Adjustability Available at V1,V2,V3

Hold-up Time 10mS at 115VAC

13mS at 230VAC

Current Sharing V1, V2,V3

Output Trim Available at V1, V2 [ADJ #]

Protection

Over Voltage Built-in at all outputs (Latch)

Over Current Installed at each rail

Over Load Typical 110-130% max. load at 115VAC

Over Temperature Installed NTC for thermal sensor at [DEG#] pin

General

Efficiency Typical 85% at 230VAC

Switching Frequency 100KHz

Dielectric Withstand IEC60368-1 regulation

Circuit Topology ZVS & LLC circuit

Transient Response Peak transient < 200mV and recovers within 0.5mS after 25% load-change

Remote ON/OFF Available at [INH#] & [EN#] pins

Power Fail Signal Available at [FAL#] pin

Power OK Signal Available for all output

Status LED <Green> means valid input voltage
<Amber> means a critical fault

N+1 Redundancy Internal OR-ing diodes

Hot-Swappable Available

Power Density 7.8 Watts/Cubic Inch

I²C interface Optional

Environmental

Operating Temperature -40°C to +70°C derate linearly from 100% load at +50°C to 60% load at +70°C
(see note 3)
(Refer to derating curve)

Storage Temperature -45°C to +85 °C

Cooling 400 LFM

Safety/EMC

Emissions (conducted) EN55032 Class B

Harmonic Current IEC61000-3-2

Safety Standard IEC60368-1 Class I

Notes:

(1)All measurement are at nominal input, full load and +25°C unless otherwise specifications.

(2)Due to requests in market and advances in technology, specifications subject to change without notification.

(3)A warm-up time 3 minutes is required to maintain V3 +12V within specific spec. after cold start at temperature from -40°C to +0°C.

(4)Tantalum capacitors connected to system is suggested for bettering Ripple & Noise against operating temperature from -40°C to +0°C.

Output voltage & current rating chart

Quad output


Model No.	Main V1 @★#≡○▼					Aux. V2 ▼@★#≡○					Aux. V3 ≡#○★@※					Aux. V4 ○★▼				
	Min.	Typ.	Volt.	Max.	Pk.	Min.	Typ.	Volt.	Max.	Pk.	Min.	Typ.	Volt.	Max.	Pk.	Min.	Typ.	Volt.	Max.	Pk.
HAC300U-490	0A	25A	+5V	40A	45A	0A	25A	+3.3V	40A	45A	0A	7A	+12V	10A	12A	0A	1A	-12V	2A	2A

Symbol: "★" OVP built-in " @" Adjustable "#" Remote sensing "≡" Active Load Sharing
 "○" Installed with Or-ing diode "▼" Buck Regulator "※" Synchronous Rectifier


- Notes: (1) Peak load less than 60sec. with duty cycle <10%.
 (2) Maximum load is the continuous operating load of each rail, but the maximum load of each rail can't be drawn from all outputs at the same time.
 (3) Total maximum output power: 300W and total combined current of +V1 and +V2 are not large than 50A.

Mechanical Dimensions (All dimensions are in mm[inch])

Weight: 762.0 g (26.9 Oz.)

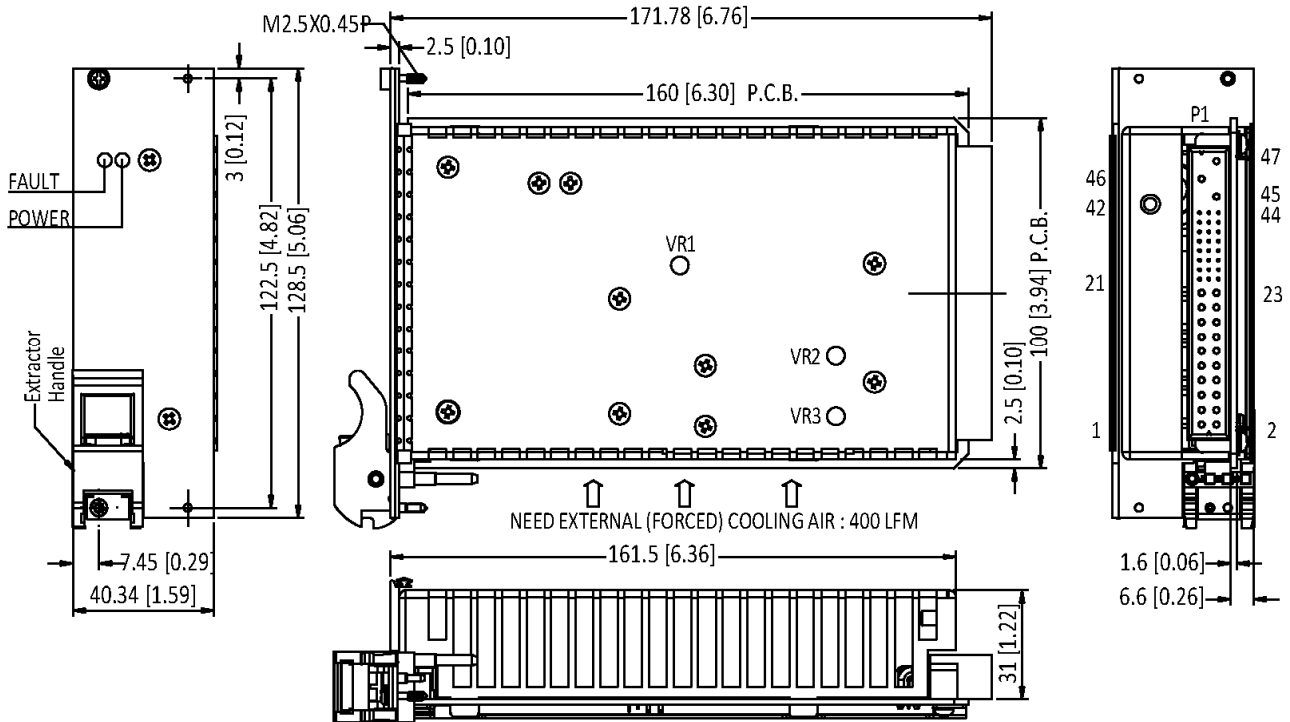

Derating Chart

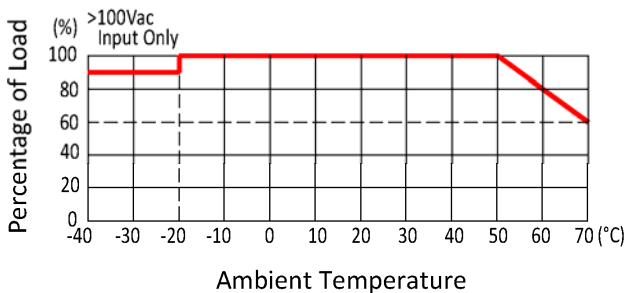

Pin assignment

Assignment	Pin No.	Assignment	Pin No.
AC-L	47	V2 C.S.	41
AC-N	46	V3	20
AC-G	45	V3 S+	36
V1	1,2,3,4	V3 C.S.	44
V1 S+	30	V4	21
V1 S-/V2 S-	34	DC COM	5,6,7,8,9,10,11,12,19,22,24
V1 Adj.	29	EN#	27
V1 C.S.	35	DEG#	38
V2	13,14,15,16,17,18	INH#	39
V2 S+	33	FAL#	42
V2 Adj.	32		